

Ricoh GX7000 Bypass Tray Setup

The following instructions will demonstrate how to setup the Ricoh GX7000 Bypass Tray. If you have not done so, please download the SubliJet-R or ChromaBlast-R Installation Guide and the Print Setup Guide that corresponds with your graphics program. These can be found on our website: www.sawgrassink.com

- 1.) First, power OFF the printer and unplug the power cord. Next, remove the multi bypass tray from its packaging and fully insert it into the back of the printer. Finally, plug in the power cord and power ON the printer (see FIGURE 1).

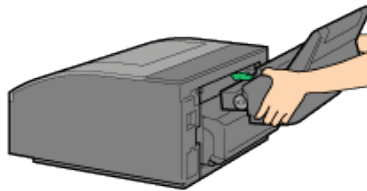


FIGURE 1

- 2.) On your desktop, click the **Start** icon and select **Devices and Printers** (see FIGURE 2).

NOTE: If you are running an older version of Microsoft Windows, you will instead select **Printers and Faxes**.

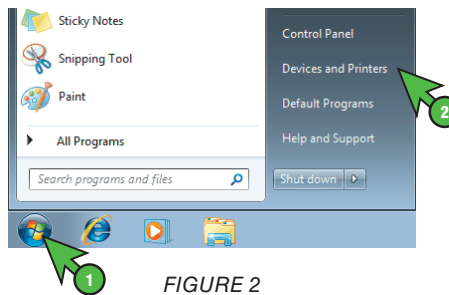


FIGURE 2

- 3.) Right-click on the GelSprinter GX7000 printer icon and select **Printer Properties** (see FIGURE 3).

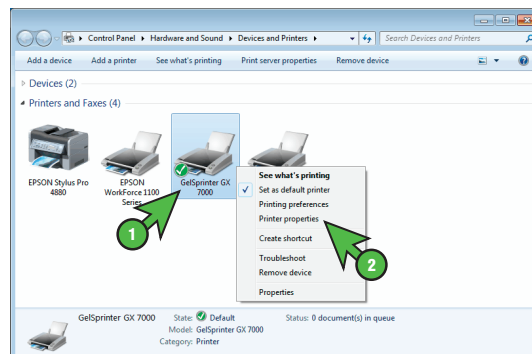


FIGURE 3

Ricoh GX7000 Bypass Tray Setup (Continued...2:3)

- 4.) If the following window appears, click **OK** to continue (see FIGURE 4).

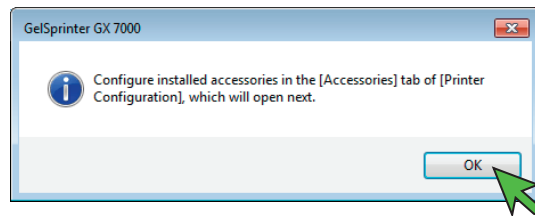


FIGURE 4

- 5.) Click the **Accessories** tab in the GelSprinter GX7000 Properties window (see FIGURE 5). Next, check the box for **Bypass Tray Unit**. Then, click **Apply** to save your changes. Finally, click **OK** to return to the Devices and Printers folder (see FIGURE 6).

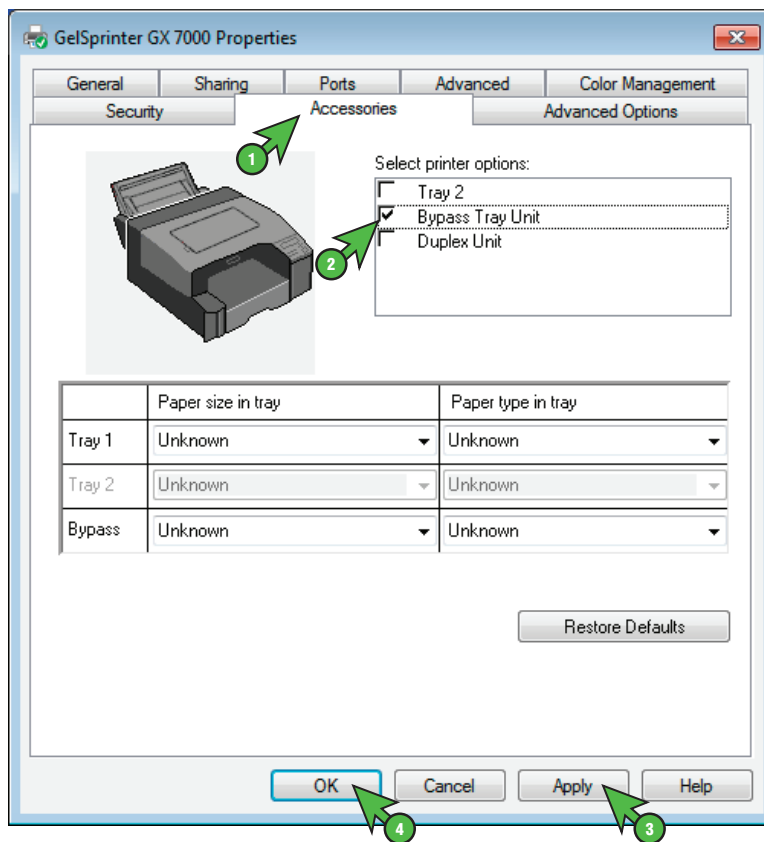


FIGURE 5

Ricoh GX7000 Bypass Tray Setup (Continued...3:3)

- 6.) In the Devices and Printers folder, right-click on PowerDriver R GX7000 or ChromaBlast R GX7000 and select **Printing preferences** (see FIGURE 6).

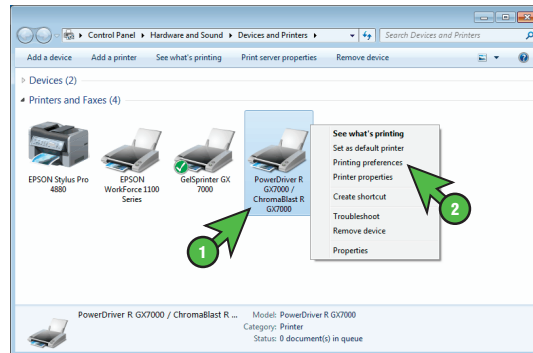


FIGURE 6

- 7.) Click the **Paper/Quality** tab in the PowerDriver R GX7000 or ChromaBlast R GX7000 Printing Preferences window (see FIGURE 7). Next, click the drop-down arrow and select **Bypass Tray** as the Paper Source. Then, click **Apply** to save your changes. Finally, click **OK** to complete the setup process.

NOTE: Choose **Automatically Select** as the Paper Source if you would like to use Tray 1 and the Bypass Tray together. With this setting, the printer will use the Bypass Tray for paper size 13" x 19" while using Tray 1 for all other paper sizes selected in the Virtual Printer Driver tab.

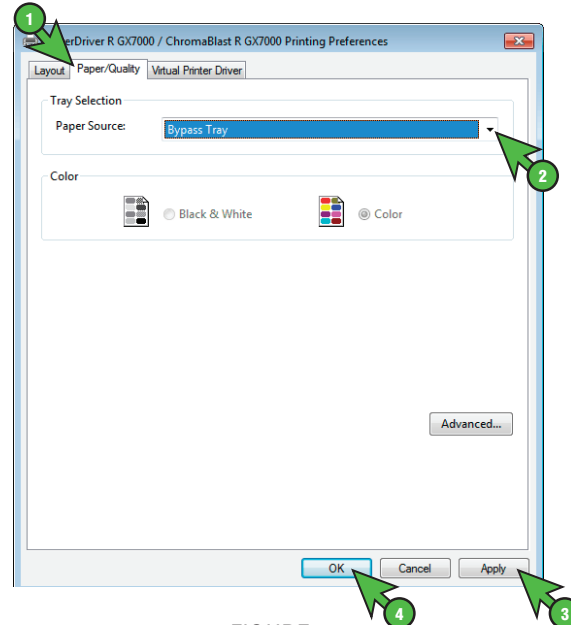


FIGURE 7

For the absolute latest information and updates on all products, materials, processes and/or procedures relative to all offerings by or through Sawgrass Technologies, Inc., please refer to our website:

www.sawgrassink.com