
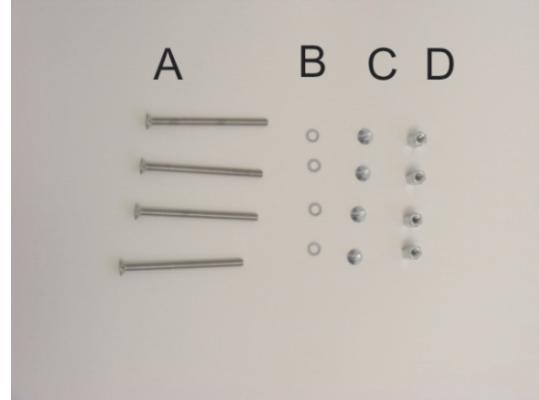


Sleeve Jig Assembly

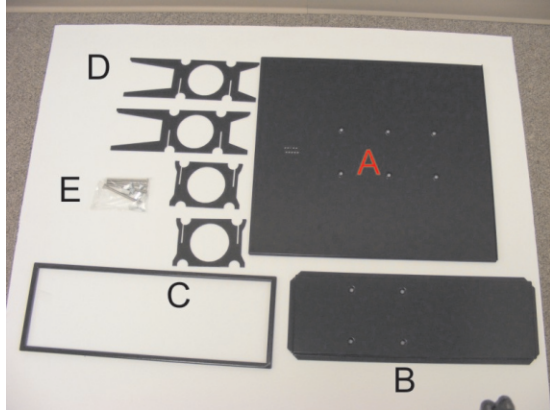

1. Remove adult jig components from packaging. You should have received the following list of items:

- A - jig base
- B - Sleeve size platen
- C - Sleeve shirt hoop
- D - Support braces
- E - Bag of assembly nuts and bolts

2. Inside of the bag of assembly nuts and bolts you will find the following:

- 1 - Long Screw used from top of platen going down toward the base.
- 2 - Washers - Do not use
- 3 - Short Screws used to mount the mounting nut to the base.
- 4 Mounting nut



3. Starting with the holes farthest from the front of the jig as illustrated above, place 4 short screws (3) through the bottom of the jig and screw them to the nuts (4). The front of the base is represented by the parallel set of holes shown above left.




4. The jig base should look like this when the base nuts have been installed.

Sleeve Jig Assembly




5. Assemble the support braces (D) by sliding the slot cut outs into each other. The long pieces align with the length of the jig and the short pieces align with the jigs width.

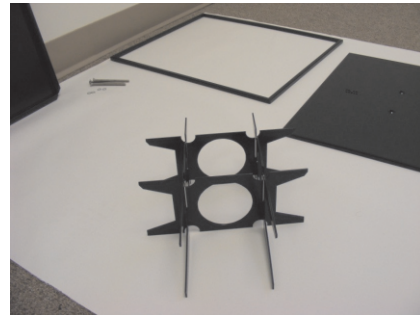

6. The support brace should look like this when assembled.



7. Once the support brace is assembled, place brace over the nuts extending from the jig base as shown above.

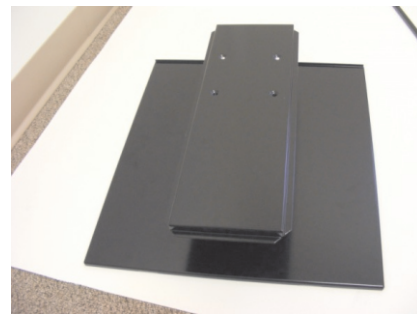

8. Place jig platen (B) on top to the support brace structure by positioning the mounting holes in the jig platen (B) to align with the mounting nuts (4) located in the base.



9. Mount the jig platen (B) to the jig base by inserting the long bolts (1) into the mounting holes on the jig platen and screwing them into the mounting nuts (4) attached to the jig base.



10. Slide the shirt loop (C) around the jig platen as shown above to finish assembly.